



Description	HCTB42M-.50V01NAA
Holding torque [Nm]	0.5
Voltage [VDC]	24
Current @24 VDC [Amp]	0.175
Resistance @ 20 degree	137 Ohm +-5%
Insulation class	F
Insulation resistance	500VDC/50Mohm min
Hi-Pot test	1500V/1mA/1Sec
Inertia [kgcm <sup>2</sup> ]	0.016
Weight [kg]	0.17
On time [ms]	10
Off time [ms]	40
Power @24 VDC [W]	4.2
Pull in voltage [V]	>16
Drop-out voltage [V]	<3.5

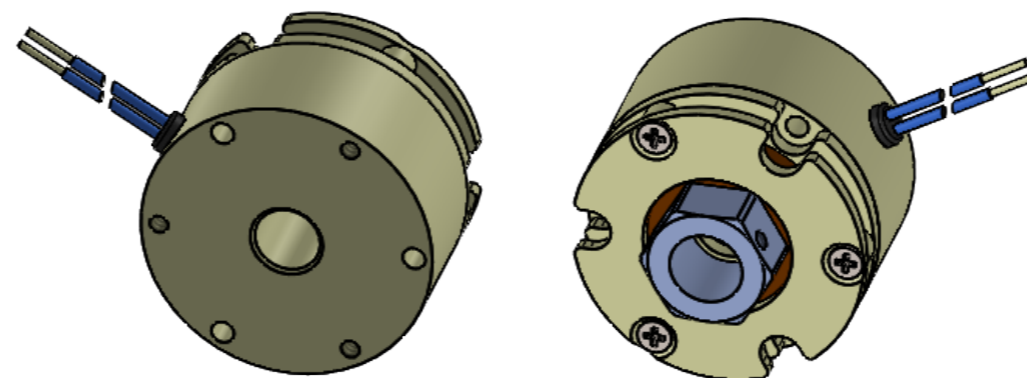

Units: mm [Inch]

<b>JVL A/S</b> Bregnerødvej 127 DK-3460 Birkerød Denmark				<b>JVL</b> www.jvl.dk	
Description					
Ø40 Spring Brake. 0,5Nm HCTB42M-.50V01NAA					
File name HCTB42M-.50V01NAA 13.slddrw					
Drw	KS	2019-12-13	Version		1.3
Appr	MVJ	2019-12-13			