


specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.m	g.cm ²	Kg
	2	1.8	3.45	3.0	1.15	2.93	0.8	102	0.5


Wiring Diagram:

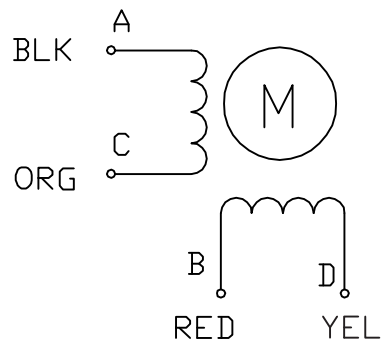

CW DIRECTION	STEP	A	C	B	D
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW see from the flange side

Dimension:

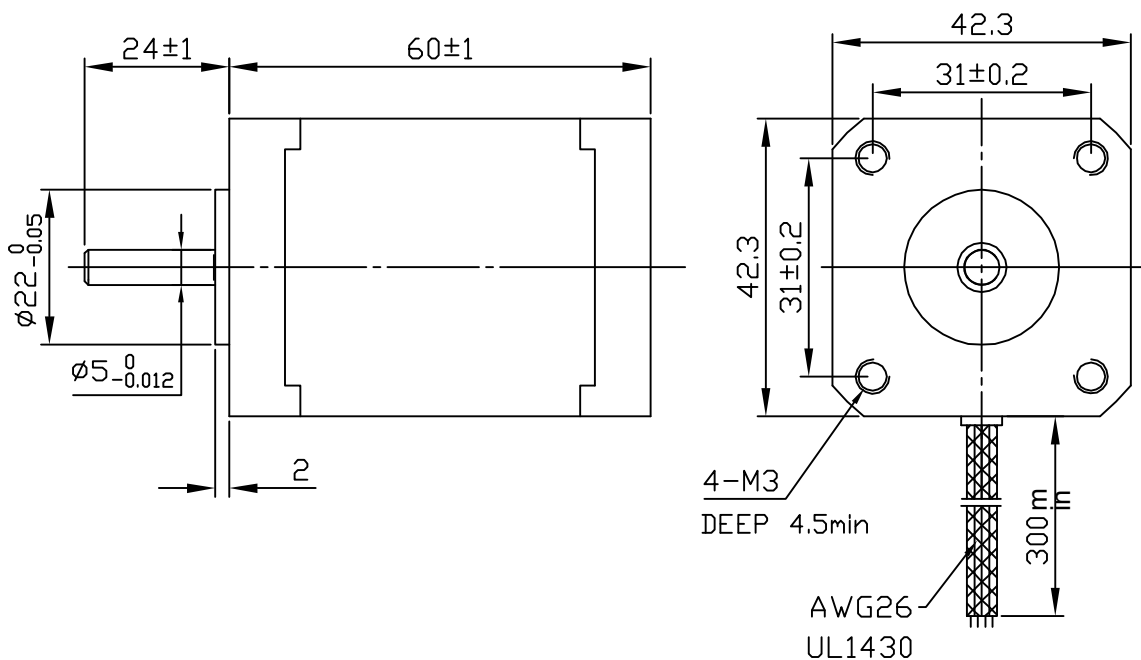

DESIGN	DATE	P/N.
REVISION NO	DESCRIPTION	DRN APP'D DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES:		MATERIAL
DECIMALS:	ANGULAR:	
.x ±0.5	±0°30'	
.xx ±0.25		
.xxx ±0.1		
UNIT: mm	THIRD ANGLE PROJECTION	SCALE
DO NOT SCALE DRAWING		SHEET OF
CHECK	APP'D	TITLE: SPECIFICATION
		USED ON: MST176A163L3AA3.0
		DWG NO. REV
		WWW.JVL.DK