


specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	DETENT TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.cm	N.cm	g.cm ²	g
	2	0.9	2.8	2.0	1.4	4.3	55	2.6	131	370



Wiring Diagram:

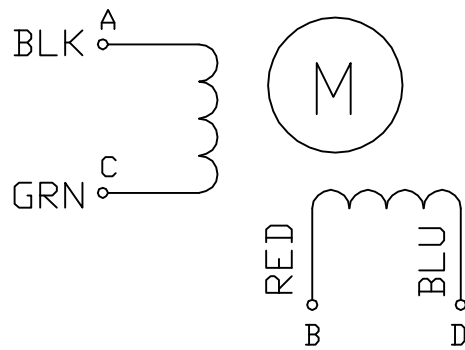

CW DIRECTION	STEP	A	C	B	D
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW see from the flange side

Dimension:

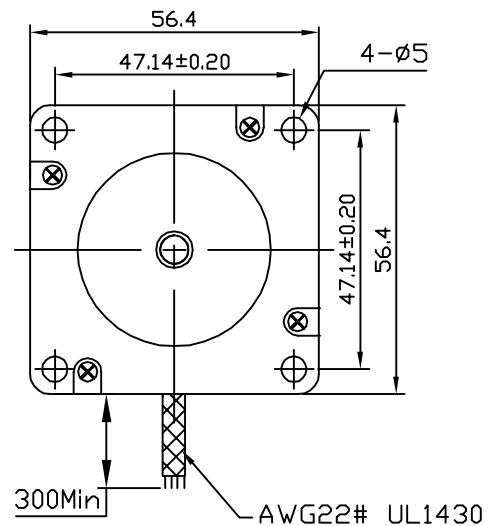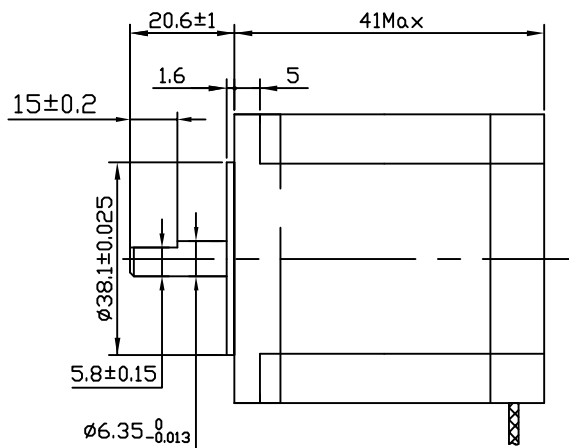

DESIGN	DATE	P/N.
gaoyun	2007.12.8	
CHECK		TITLE: SPECIFICATION
APPD		USED ON: MST230F83-L4AA2.0
SCALE		DWG NO. FX3.162. JS
SHEET	OF	REV
THIRD ANGLE PROJECTION		www.jvl.dk

UNLESS OTHERWISE SPECIFIED TOLERANCES:
 DECIMALS: .x ±0.5 .xx ±0.25 .xxx ±0.1
 ANGULAR: ±0°30'
 UNIT: mm
 DO NOT SCALE DRAWING