


Revision	Note	Date + init
1.0	First Edition	2014-10-09 PCR
1.1	New Template, hole moved for clamp screw, other minor adjustments.	2020-01-29 JVA
1.2	4 slots in shaft. Specified transfer Torque	2020-06-09 JVA




2020-01-29 JVA: Design Change Notification:
 Ultimo 2020 the clamp screw hole will be on same side as connector and have diameter 8mm.

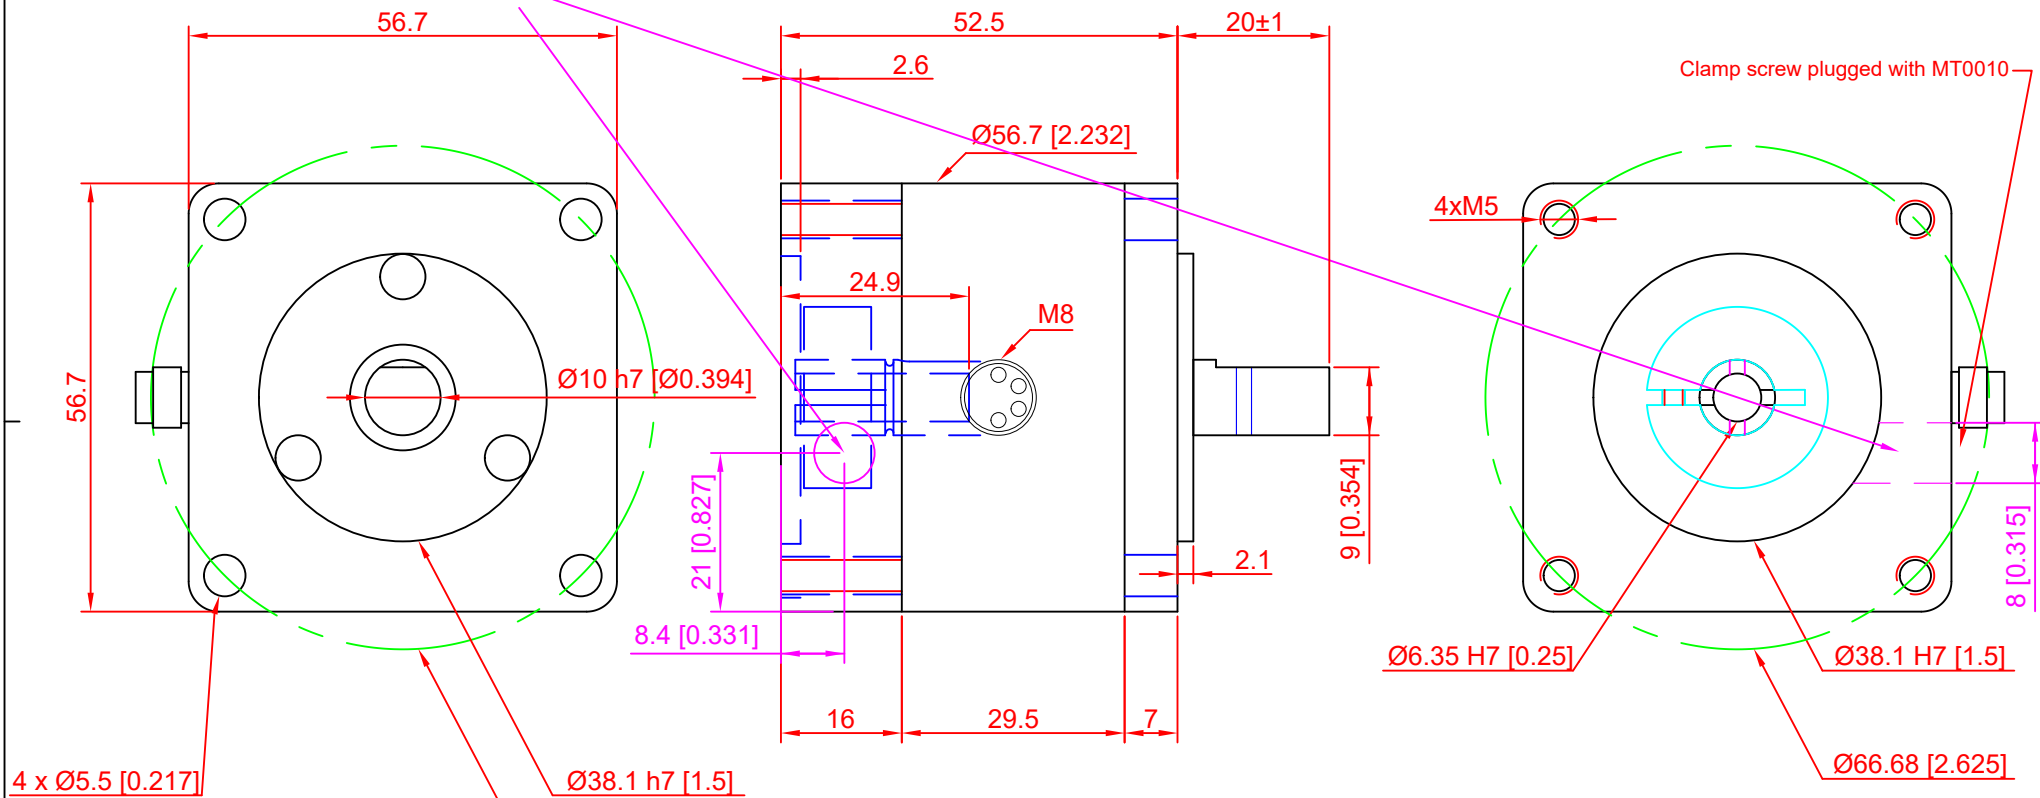

Shaft Collar Screw Torque (M3): 2Nm
 Max transfer torque: 2.8Nm
 Brake torque: 1.5Nm

All dimension in mm [inch]
 General tolerance is +/-0.3 mm [+/-0.008]

A4 Landscape_12.dwg 2020-01-29 JVA

  www.jvl.dk		JVL A/S Bregnerødvej 127 DK-3460 Birkerød Tel: +45 4582 4440 Email: jvl@jvl.dk		File name: MAB23x-31_V1.2 Part no. MAB23x-31	
		Description Brake 24V for NEMA23 ID6.35/OD10 M8 1.5Nm			
Drw	JVA + 12	Date	2020-06-09	Unit	mm
App	PCR + 12	Date	2020-06-09	Scale	1:1
ERP	JVA + 12	Date	2020-06-09	 A4	Tolerances Unless Specified
					Linear: 0.5-6 ±0.1 6-30 ±0.2 >30 ±2% Angles: ±3°