


Cable data:

- 2D robot cable. Must withstand permanent movement/bending
- Bending diameter min. 10cm.
- Screened
- Resistant to oil
- Outside color = Black
- Outside diameter = 7 - 9 mm
- UL Recognized
- Wire dimension 0.75mm² (x4)
- Cablerating : 600V
- RoHS compatible

Hummel M16 female

Housing: JVL part no. WG0230 / Hummel part no. 7810.4000.00
 Crimp contact (female): JVL part no. WG0229 / Hummel part no. 7010.9816.02
 Nylon insert: JVL part no. WG0227 / Hummel part no. 7003.9431.02

Settings for crimp tool PEW 8.72: with 0.75 mm ²
 Locator: position 9
 Crimp depth: 0.97 mm

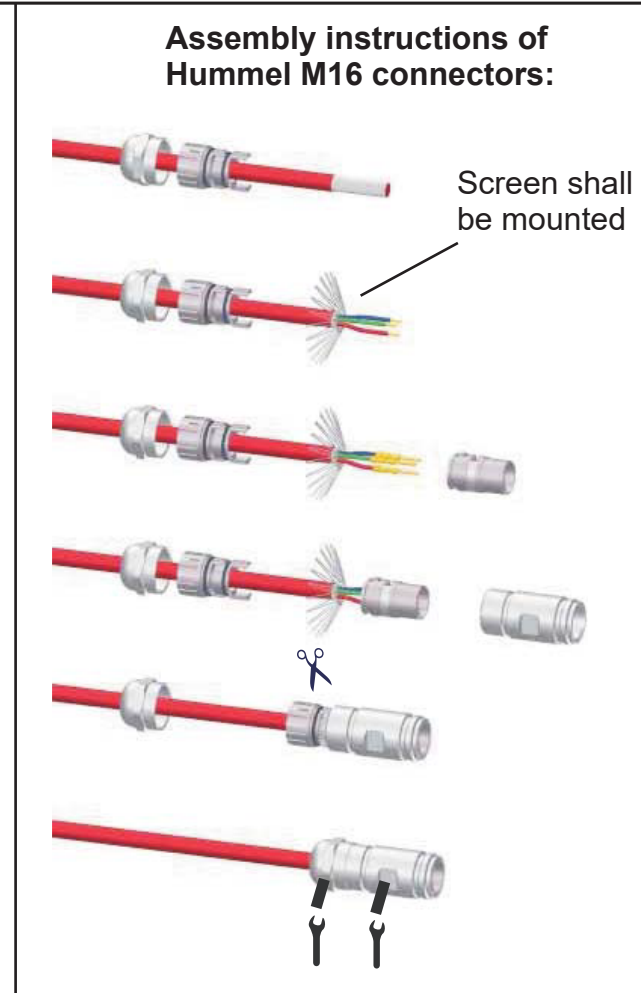

J1 Pins	Wire color	Function
A	Blue	Neutral
C	Brown	230VAC
(Earth)	Green/Yellow	(Earth)

LT0158-11GB

JVL Industri Elektronik A/S Bregnerødvej 127 • DK-3460 Birkerød Tel: +45 4582 4440 Fax: +45 4582 5550	WP0402 230V Mains Power Cable	Version - 1.1	Date: 25-05-10	
		Approved by: BVJ	Drawn by: PCR/BVJ	