



Date	Description	Revision

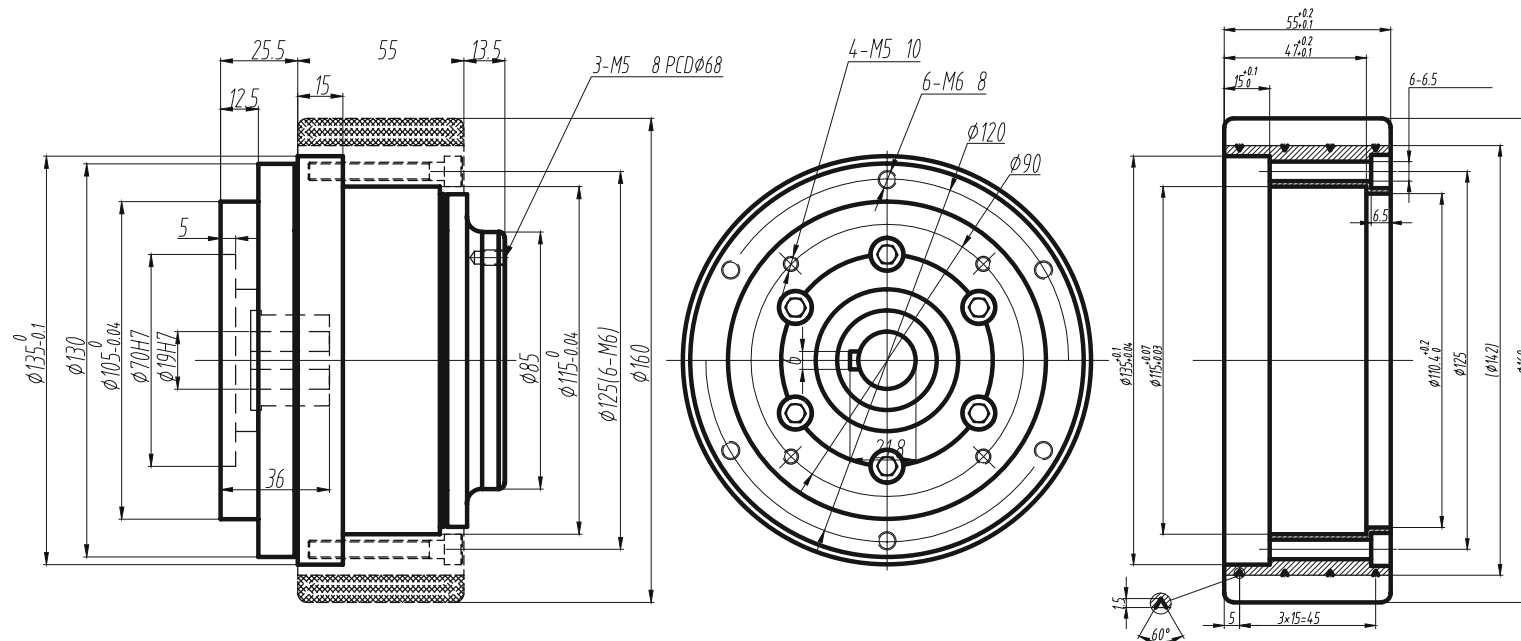

technical parameter			
Nominal torquet	60 Nm	Max.output torque	120 Nm
Rated input speed	3000rpm	Max.input speed	5000rpm
Max.radial force	4000N	Speed 500rpm	6800N
Max.axial force	500N	Speed 500rpm	850N
Maximum efficiency	90%	Operating temp	-25°~ +90°
Installation method	arbitrarily	Lubrication mode	Permanent lubrication
Weight	5.5Kg+ 2.5Kg	Average life span	20000h
Protection level	IP64	Flange accuracy	DIN 42955-R
Standard backlash		Precise backlash	
Gear precision grade	6 GB/T10095-2008		
Motor power	750W		
Motor dimensions	φ19*35/φ70*3/4-φ5.5-φ90		

No.	Part No.	Description	Unit	Qty

					 www.jvl.dk					JVL A/S Bregnerødvej 127 DK-3460 Birkerød Tel: +45 4582 4440 Email: jvl@jvl.dk					A4					File name:									
															Part no.														
															HSHVA6N030MLNS805_A6														
		Sign+vv		Date		Unit		mm		Tolerances					Description AGV Ø160mm gear 30:1 MAC802 <15'														
Drw						Scale		--		Unless Specified																			
App										Linear															0.5~6 ±0.1				
																									6~30 ±0.2				
ERP																									>30 ±2%				
															Angles					+3°									