

# 3M™ Novec™ 1700 Electronic Grade Coating

## Introduction

3M™ Novec™ 1700 Electronic Grade Coating is a clear, low viscosity, low surface tension solution of a fluorochemical acrylic polymer carried in a hydrofluoroether solvent. Designed for moisture and corrosion protection of printed circuit boards and electronic components, it dries to a thin, transparent, film with excellent hydrophobic and oleophobic properties. It is easy to apply, does not need post-curing, is removable and repairable. It is non-flammable, low in toxicity, non-ozone depleting and RoHS compliant.

## Construction

Solids	Solvent	Color	Container Size
2.0 wt% fluoropolymer	3M™ Novec™ 7100DL Engineered fluid	Clear	3.5 gal (40lb/18.1 kg), 1 gal (12lb/5.4 kg)

## Typical Physical Properties

Property	Coating Solution
Appearance	Clear, colorless to light-colored liquid solution
Solids	2 wt% fluoropolymer
Solvent	3M™ Novec™ 7100DL Engineered Fluid
Specific Gravity	1.5
Boiling Point of Solvent	61°C (142°F)
Flash Point	None
Environmental System	Low in toxicity, non-ozone depleting, non-flammable, VOC exempt (US EPA), RoHS compliant, contains no chlorine or bromine One Part

Property	Fluoropolymer Coating
Appearance	Transparent, colorless
Coating Thickness	0.1-1.0 microns (depending on application method)
Solvent and Chemical Resistance	Yes
T <sub>g</sub> (glass transition temperature)	44.5°C
Thermal Stability of Dry Film	Repellent to chlorinated silicone oil after 24 hours at 175°C
Contact Angles (static, dip coated/dried on glass substrate)	105° (water), 65° (hexadecane)
Refractive Index	1.39
Shelf Life	Four years from date of manufacture in unopened container
Solder-Through Repairability	Yes
Nonflammability	Meets UL 94 V-0
Dielectric Constant @30% RH	3.1 (@1 kHz)
Dissipation Factor @30% RH	0.0089 (@1 kHz)
Dielectric Breakdown Strength @35% RH	1000 V/mil

Not for specification purposes. All values @ 25°C unless otherwise specified.

## Features

- Easy application and processing – dries in seconds without the need for thermal post-curing
- Requires little or no masking
- Is easily removed for rework & repair
- Allows solder-through repairability
- Contains no volatile organic compounds (VOCs) and has low global warming potential
- Is thermally and electrically stable with excellent dielectric properties
- Can be applied to metals, glass or epoxy laminates
- Provides excellent repellency, anti-wetting and anti-sticking properties against liquids – water, hydrocarbons, silicones, and photoresists
- Is insoluble in solvents such as heptane, toluene & water
- The polymer can endure up to 175°C for prolonged periods and maintain good repellency
- Has low surface energy which allows lubricating oils, silicones, photoresist solutions, etc. to bead and drain freely from coated surfaces
- Has excellent surface wetting including under low profile components



## Application Ideas

- Provides excellent moisture, chemical and corrosion protection to printed circuit boards and their components
- Is an easy and cost effective alternative to conformal coatings
- Can be used as a sacrificial surface treatment that can be selectively removed with Novec Engineered Fluids
- Can serve as
  - an anti-stiction coating for liquid crystal displays, micromotors or MEMS (Micro Electronic Mechanical Systems) components
  - an anti-migration coating for displays, spindle motors or lubricated electronic parts or
  - an anti-corrosion coating for a variety of materials and components

## Application Techniques

Can be dipped, sprayed or selectively deposited. Water should be kept out of coating bath as contact will interfere with coating deposition. Surfaces to be coated should be clean and dried before application. Masking may not be required for many connector types – but testing is suggested. The solvent will evaporate quickly and the fluoropolymer film will dry in minutes.

Application Options	Dipping (preferred), spray, syringe dispense
Dilution	Can be diluted with 3M™ Novec™ 7100DL Engineered Fluid
Drying/Curing	Dries at room temperature; can be handled in under two minutes
Removability	Removable with Novec 7100 DL Engineered Fluid

## Safety, Handling, Storage, Shelf Life

To avoid thermal decomposition, the coating solution should not be heated above 150°C (302°F) and the dried fluoropolymer film should not be heated to temperatures above 250°C (482°F). When stored under conditions of 16-27°C (60-80°F) and less than 60% R.H. in the original, unopened container, the shelf life is certified for four years. Before using this product, please read the current product Material Safety Data Sheet (available through your 3M sales or technical service representative or at [www.3M.com/Novec](http://www.3M.com/Novec)) and the precautionary statement on the product package. Follow all applicable precautions and directions.

## For Additional Information

To request additional product information or sales assistance, contact 3M Customer Service at one of the numbers below or visit [www.3M.com/Novec](http://www.3M.com/Novec). For other 3M global offices or information on other 3M products for electronics, visit our web site at [3M.com/electronics](http://3M.com/electronics).

### The 3M™ Novec™ Brand Family

The Novec brand is the hallmark for a variety of proprietary 3M products. Although each has its own unique formula and performance properties, all Novec products are designed in common to address the need for safe, effective, sustainable solutions in industry-specific applications. These include precision and electronics cleaning, heat transfer, fire protection, lubricant deposition and several specialty chemical applications.

3M™ Novec™ Engineered Fluids • 3M™ Novec™ Aerosol Cleaners • 3M™ Novec™ 1230 Fire Protection Fluid • 3M™ Novec™ Electronic Grade Coatings • 3M™ Novec™ Electronic Surfactants

United States	China	Europe	Japan	Korea	Singapore	Taiwan
3M Electronics Markets Materials Division 800 810 8513	3M China Ltd. 86 21 6275 3535	3M Belgium N.V. 32 3 250 7521	Sumitomo 3M Limited 813 3709 8250	3M Korea Limited 82 2 3771 4114	3M Singapore Pte. Ltd. 65 64508888	3M Taiwan Ltd. 866 2 2704 9011

**Product Use:** All statements, technical information and recommendations contained in this document are based on tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

**Warranty and Limited Remedy:** Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, our exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental, or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



### Electronics Markets Materials Division

3M Center, Building 224-3N-11  
St. Paul, MN 55144-1000  
[www.3M.com/novec](http://www.3M.com/novec)  
1-800-810-8513

Please recycle. Printed in USA.  
© 3M 2011. All rights reserved.  
Issued: 6/11 7959HB  
60-5002-0521-0

3M and Novec are trademarks of 3M Company.  
Used under license by 3M subsidiaries and affiliates.

# 3M™ Novec™ 1700 and 1702 Electronic Grade Coatings

## Process Guidelines for Printed Circuit Board Coating

George Ip, Senior Technical Specialist, and Karl Manske, Senior Technical Chemist, 3M Electronic Markets Materials Division

3M™ Novec™ 1700 and 1702 Electronic Grade Coatings can be outstanding choices for protecting printed circuit boards (PCBs) in today's demanding electronic applications. They both provide protection against moisture and other environmental concerns that could shorten a device's age life. They are also nonflammable and have low toxicity.

Novec 1700 and 1702 coatings are clear, low viscosity solutions of a fluorochemical acrylate polymer coating carried in a hydrofluoroether solvent. This solvent, 3M™ Novec™ 7100DL Engineered Fluid, is VOC-exempt per U.S. EPA guidelines. When applied to clean, moisture-free surfaces such as PCB laminates, flexible polyimide films, copper, aluminum, ceramic, steel or plastic substrates, Novec 1700 and 1702 coatings dry to thin transparent films. These coatings can then provide excellent anti-wetting, anti-stiction, anti-migration, and anti-corrosion properties required in many diverse assemblies. These low surface energy films repel, and are insoluble in, non-fluorinated liquids such as water, most hydrocarbon oils, and photoresist solutions. They can also endure up to 175°C for prolonged periods and still maintain good repellency. This makes them very versatile in the types of applications they can be used for.

Novec 1700 and 1702 coatings are easy to apply with a variety of methods. They do not require high curing temperatures and are removable if need be. The procedures below highlight the different recommended methods for applying these coatings. Additional support and information for your specific process can be provided by contacting the authors of this paper.

### The Process of Coating Printed Circuit Boards

Printed circuit boards come in an endless array of shapes and sizes ranging from small, single-function boards, to flex circuits with complicated geometry to large, complex multi-PCB assemblies. As a result, coating these boards can present significant challenges.

**Coating with Novec 1700 coating:** Whereas conformal coatings are often used for moisture and environmental protection on circuit boards, often a thinner coating that is quick and easy to apply without curing is more than sufficient. Novec 1700 coating is one such material and is used by many for this type of protection. 3M has developed a number of easy processing methods for this coating that result in accuracy of placement, repeatability and selectivity.

The Novec 1700 coating process depends on several criteria. PCB geometry, production volume, budget, throughput speed and coating coverage are just some of the considerations. The five most common application processes for applying Novec 1700 coatings are dip, spray, drip, capillary and brush methods. In all of these, the key is controlling the flow of the Novec 1700 coating solution. The reason for this is because it has a lower viscosity and lower surface tension than most other coating solutions delivered out of aqueous or hydrocarbon-based solvents. The solvent in Novec 1700 coating is nonflammable and low in toxicity. Following good industrial hygiene practices, however, plus having ventilation and a local exhaust fan is always recommended.

**Dip coating** is a simple and effective coating process for full coverage. The low viscosity and low surface tension of Novec 1700 coating will wet virtually any substrate and penetrate very small spaces. The design layout of the PCB must be considered to avoid pooling and drag-out losses of the coating solution. Dip coating tanks for the Novec 1700 coating are commonly constructed of stainless steel or transparent materials like glass or clear acrylic plastic (PMMA). Dip coating processes can be manual or automatic. Maintaining a minimum tank volume, enough to just cover the assembly, with automatic dispensing of coating solution can help to minimize cross contamination. A deep tank with high freeboard for evaporation control is recommended. Different rates will provide different coating thicknesses and the optimal conditions will be based on the board size, layout and density placement of components.

**Spray coating** can be done manually or selectively with robotic spray equipment. Using a pre-programmed control system, a robotic sprayer can effectively and consistently spray complex geometric components, reducing the amount of time and effort spent manually applying a coating. Manual spraying may require less equipment but is inherently more variable and may lead to over application and coating waste.

**Drip coating** by selective semi-automatic drop/line dispensing of Novec 1700 coating with a programmable peristaltic pump is common at assembly lines where labor cost is low and a budget is not available for automation scale up. With this method, the flow rate and volume can be precisely controlled while maintaining manual control of where the coating is applied.

**Capillary coating** with boundary control can be effective for better control of the coating. The coating solution can be controlled by creating a shaped mold that barely comes into contact with the PCB selective coating area. The Novec 1700 coating is a low viscosity liquid and very effective in penetrating capillary gaps and wetting the area where the mold and substrate meet. The low surface tension of the coating solution wets most surfaces including difficult to wet, low surface energy substrates like silicones and fluoropolymers.

**Brushing** is usually not recommended for production. Brush tips can pick up debris from the substrate leading to cross-contamination of the coating solution. Controlling the amount of coating applied is difficult. Excessive waste and variations in the actual amount of coating applied are major concerns.

**Coating with 3M™ Novec™ 1702 Electronic Grade Coating:** Small, fine pitch connectors can very easily wick up coating material. This is caused by the capillary flow of a low viscosity coating solution. Applying Novec 1702 coating, which is a lower concentration version of the Novec 1700 coating, around these fine pitch connectors is then recommended. With proper control of volume and application area flooding, the mating surfaces of connectors can be avoided. A small amount of Novec 1702 coating wicked up at the connector boundary usually does not affect connector continuity. Evaluation of the coating and the application process on connectors on the production line is recommended.

## Process Control and Quality Control Recommendations


The dispensing rate of Novec 1700 coating can be measured with a simple electronic balance. Measuring the liquid dispense weight per minute at the beginning of every four hour shift, for example, has been found to be an effective process control method at production sites.

For identification of a coated PCB on the assembly line, small dots of the coating solution can be put on black surface mount components (see Figure 1). The Novec 1700 coating marks on dark surfaces are obvious to the naked eye.



**Figure 1.** Examples of marking dark components with drops of Novec 1700 coating for identification of coated assemblies

On lighter colored PCB substrates or components, the boundary of polymer film on uncoated areas and on areas where the Novec 1700 coating has been applied can be seen under a microscope with proper lighting. It is much easier to see the coating by comparing PCB assemblies with and without the coating side by side (see Figure 2).

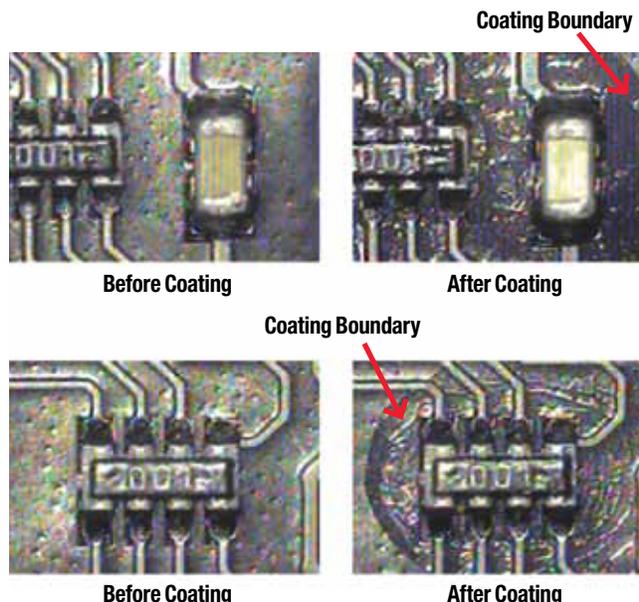


**Figure 2.** Side-by-side comparison of uncoated and coated components under magnification.

An oil wetting test can also help to identify the Novec 1700 coating on a PCB. Dried films of this coating repel liquids such as mineral oil, paraffin oil and hexadecane. The non-wetting of the mineral oil or paraffin oil on the Novec 1700 coated areas is a simple method for coating verification in the inspection process. (see Figure 3).



**Oil wetting on uncoated PCB**

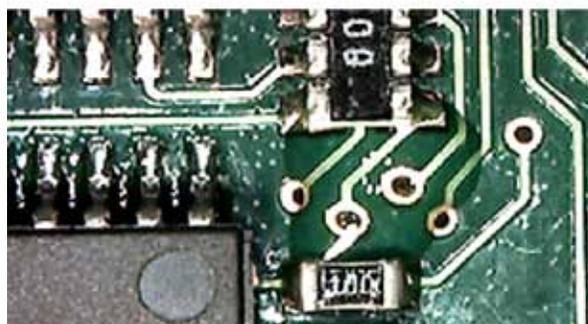

**Oil non-wetting on Novec 1700 coated PCB**

**Figure 3.** Using oil wetting/non-wetting to inspect uncoated and Novec 1700 coated areas on PCB substrate.

The recommended environment for applying 3M™ Novec™ 1700 coating is 20-27°C and 40-70 % relative humidity (RH). Humidity control helps to prevent moisture condensation on the polymer film due to evaporative cooling of the coating solvent. Temperature control helps to keep a reasonable drying time in the production process. At 25°C, a 50 microns thick wet film (polymer and solvent) of Novec 1700 coating can be dried within 5 seconds.

In spray and drip application systems, the nozzle and dispenser tip may become clogged with the Novec 1700 coating polymer when the coating process is idle over 30 minutes. The clogging problem can be fixed by simply dipping the nozzle and dispenser tip into Novec 1700 coating liquid or 3M™ Novec™ 7100 Engineered Fluid as a solvent for 3 seconds. This will dissolve the polymer residue and should return the nozzle and dispenser tip to proper working order.

## Rework

Dried films of Novec 1700 coating can be dissolved and stripped from coated assemblies with Novec 7100 fluid as a solvent. Because the thin polymer film has a minimal affect on heat transfer, soldering and de-soldering directly on Novec 1700-coated printed circuit board assemblies is possible. An exhaust fan and ventilation are always necessary during soldering and de-soldering processes.

**Questions and comments about the information in this Application Note may be directed to the authors:**

**George Ip – [gyip@mmm.com](mailto:gyip@mmm.com)**

**Karl Manske – [kjmanske@mmm.com](mailto:kjmanske@mmm.com)**

**The 3M™ Novec™ Brand Family**

The Novec brand is the hallmark for a variety of patented 3M compounds. Although each has its own unique formula and performance properties, all Novec products are designed in common to address the need for safe, effective, sustainable solutions in industry-specific applications. These include precision and electronics cleaning, heat transfer, fire protection, lubricant deposition and several specialty chemical applications.

3M™ Novec™ Engineered Fluids • 3M™ Novec™ Aerosol Cleaners • 3M™ Novec™ 1230 Fire Protection Fluid • 3M™ Novec™ Electronic Coatings • 3M™ Novec™ Electronic Surfactants

United States	China	Europe	Japan	Korea	Singapore	Taiwan
3M Electronics Markets Materials Division 800 810 8513	3M China Ltd. 86 21 6275 3535	3M Belgium N.V. 32 3 250 7521	Sumitomo 3M Limited 813 3709 8250	3M Korea Limited 82 2 3771 4114	3M Singapore Pte. Ltd. 65 64508888	3M Taiwan Limited 886 2 2704 9011

**Important Notice:** This technical information is being provided free of charge and may in part be based on testing performed at 3M laboratory facilities and/or non-3M sources of testing and/or information collected from numerous industry sources. While we believe these information sources and testing results are reliable, their accuracy or completeness are not guaranteed. Your end user results may vary due to differences in test types, conditions and application. This information is intended for use by persons with the knowledge and technical skills to analyze handle and use such information. You must evaluate and determine whether the product itself and/or product information and/or other information provided is suitable for your intended application. The foregoing information is provided “AS-IS”. In providing this information 3M makes no warranties regarding product or information use or performance, including any implied warranty of merchantability or fitness for a particular use.

**Product Use:** All statements, technical information and recommendations contained in this document are based on tests or experience that 3M believes are reliable. However, many factors beyond 3M’s control can affect the use and performance of a 3M product in a particular application, including conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user’s knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user’s method of application.

**Warranty and Limited Remedy:** Unless stated otherwise in 3M’s product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user’s application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M’s and seller’s sole obligation will be, at 3M’s option, to replace the product or refund the purchase price.

**Limitation Of Liability:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental, or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**Electronics Markets  
Materials Division**

3M Center, Building 224-3N-11  
St. Paul, MN 55144-1000  
www.3M.com/novec  
1-800-251-8634

Please recycle. Printed in USA.  
Issued: 2/11 © 3M 2011.  
All rights reserved. 7569HB  
60-5002-0499-9

3M and Novec are trademarks of 3M.  
Used under license by 3M subsidiaries and affiliates.