



# Power Supply PSU05-045



## ■ Features :

- Universal AC input/Full range
- Protections: Short circuit/Over load/Over voltage/Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508(industrial control equipment)approved
- LED indicator for power on
- 100% full load burn-in test
- Fix switching frequency at 100KHz
- 3 years warranty



## SPECIFICATION




MODEL		PSU05-045
OUTPUT	DC VOLTAGE	5V
	RATED CURRENT	5A
	CURRENT RANGE	0 ~ 5A
	RATED POWER	25
	RIPPLE & NOISE (max.) Note.2	100mVp-p
	VOLTAGE ADJ. RANGE	4.75 ~ 5.5V
	VOLTAGE TOLERANCE Note.3	±2.0%
	LINE REGULATION	±1.0%
	LOAD REGULATION	±1.0%
SETUP, RISE, HOLD TIME	800ms, 60ms, 50ms/230VAC at full load	
INPUT	VOLTAGE RANGE	85 ~ 264VAC 120 ~ 370VDC
	FREQUENCY RANGE	47~63Hz
	EFFICIENCY (Typ.)	72%
	AC CURRENT	1.5A/115VAC 0.75A/230VAC
	INRUSH CURRENT (max.)	COLD START 30A/115VAC 60A/230VAC
	LEAKAGE CURRENT	<1mA / 240VAC
PROTECTION	OVER LOAD	105 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed
	OVER VOLTAGE	5.75 ~ 6.75V Shut down o/p voltage, re-power on to recover
	OVER TEMPERATURE	Tj 135°C typically (U1) Detect on heat sink of power transistor Protection type : Shut down o/p voltage, recovers automatically after temperature goes down
ENVIRONMENT	WORKING TEMP.	-10 ~ +50°C (Refer to output load derating curve)
	WORKING HUMIDITY	20 ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL508, TUV EN60950-1 Approved
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC
	EMI CONDUCTION & RADIATION	Compliance to EN55011, EN55022 (CISPR22) Class B
	HARMONIC CURRENT	Compliance to EN61000-3-2, -3
OTHERS	EMM IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN61000-6-2 (EN50082-2) Heavy industry level, criteria A
	MTBF	364.6K hrs min. MIL-HDBK-217F (25°C)
	DIMENSION	93*78*67mm (L*W*H)
NOTE	PACKING	0.31Kg; 48pcs/16.1Kg/1.3CUFT
	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.	



# Power Supply PSU05-045

## Mechanical Specification

Case No. 918A Unit:mm

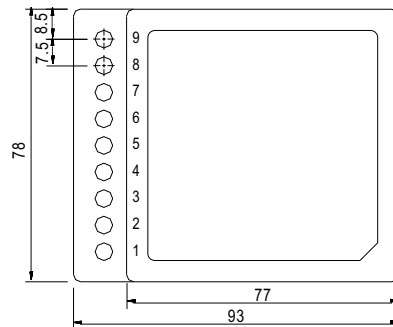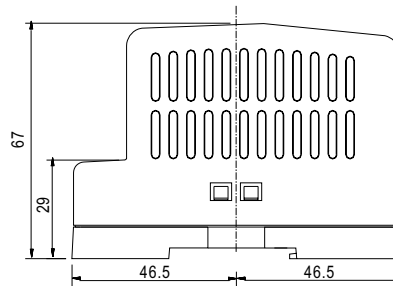


Install DIN rail TS35/7.5 or TS35/15


### Terminal Pin. No Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	6,7	DC OUTPUT+V
2	AC/N	8	LED
3	FG ⊕	9	+V ADJ.
4,5	DC OUTPUT -V		


## Block Diagram

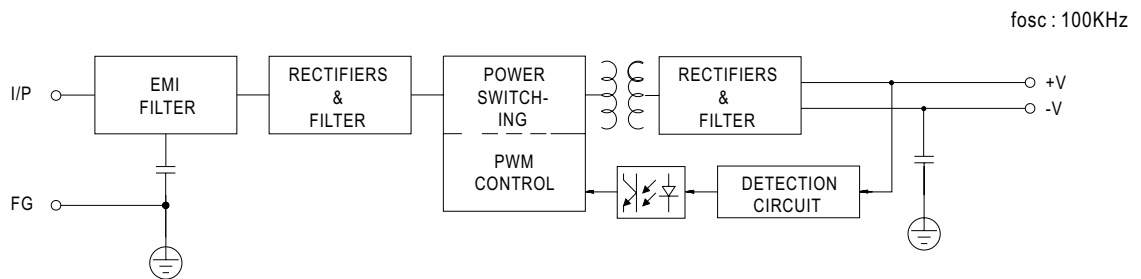

## Output Derating

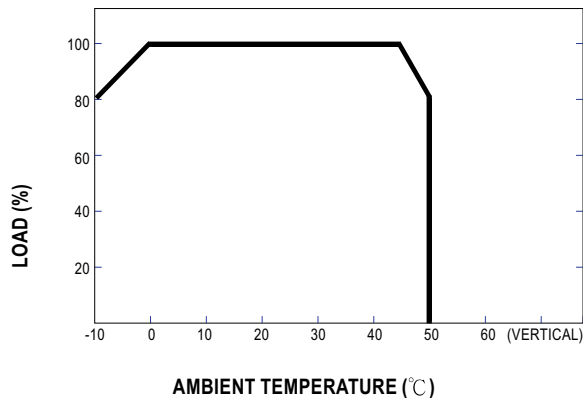

## Static Characteristics (24V)

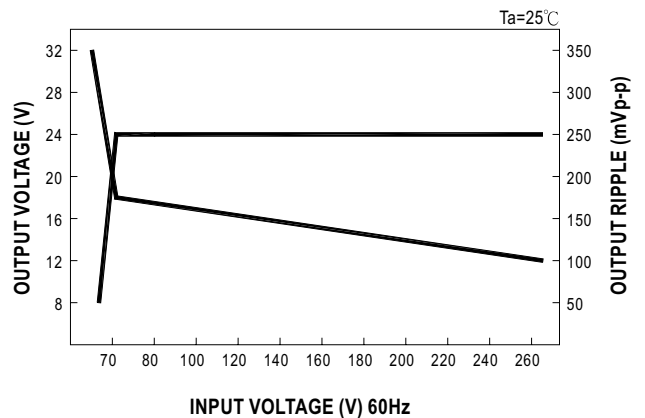

Bregnerødvej 127  
DK-3460 Birkerød  
Tel. +45 4582 4440  
Fax. +45 4582 5550

**JVL Industri Elektronik A/S**